



MAXIMUM WORKING CONDITIONS
COLD WORKING PRESSURE:
 SSB-6K OPTION - 6,000PSI (414BAR)
 (AT REDUCED TEMPERATURE)

TEMPERATURE:
 PTFE PACKING -
 -29°C (-20.2°F) TO 240°C (464°F)
 (AT REDUCED PRESSURE)

APPROX WEIGHT
 1.5 Kg

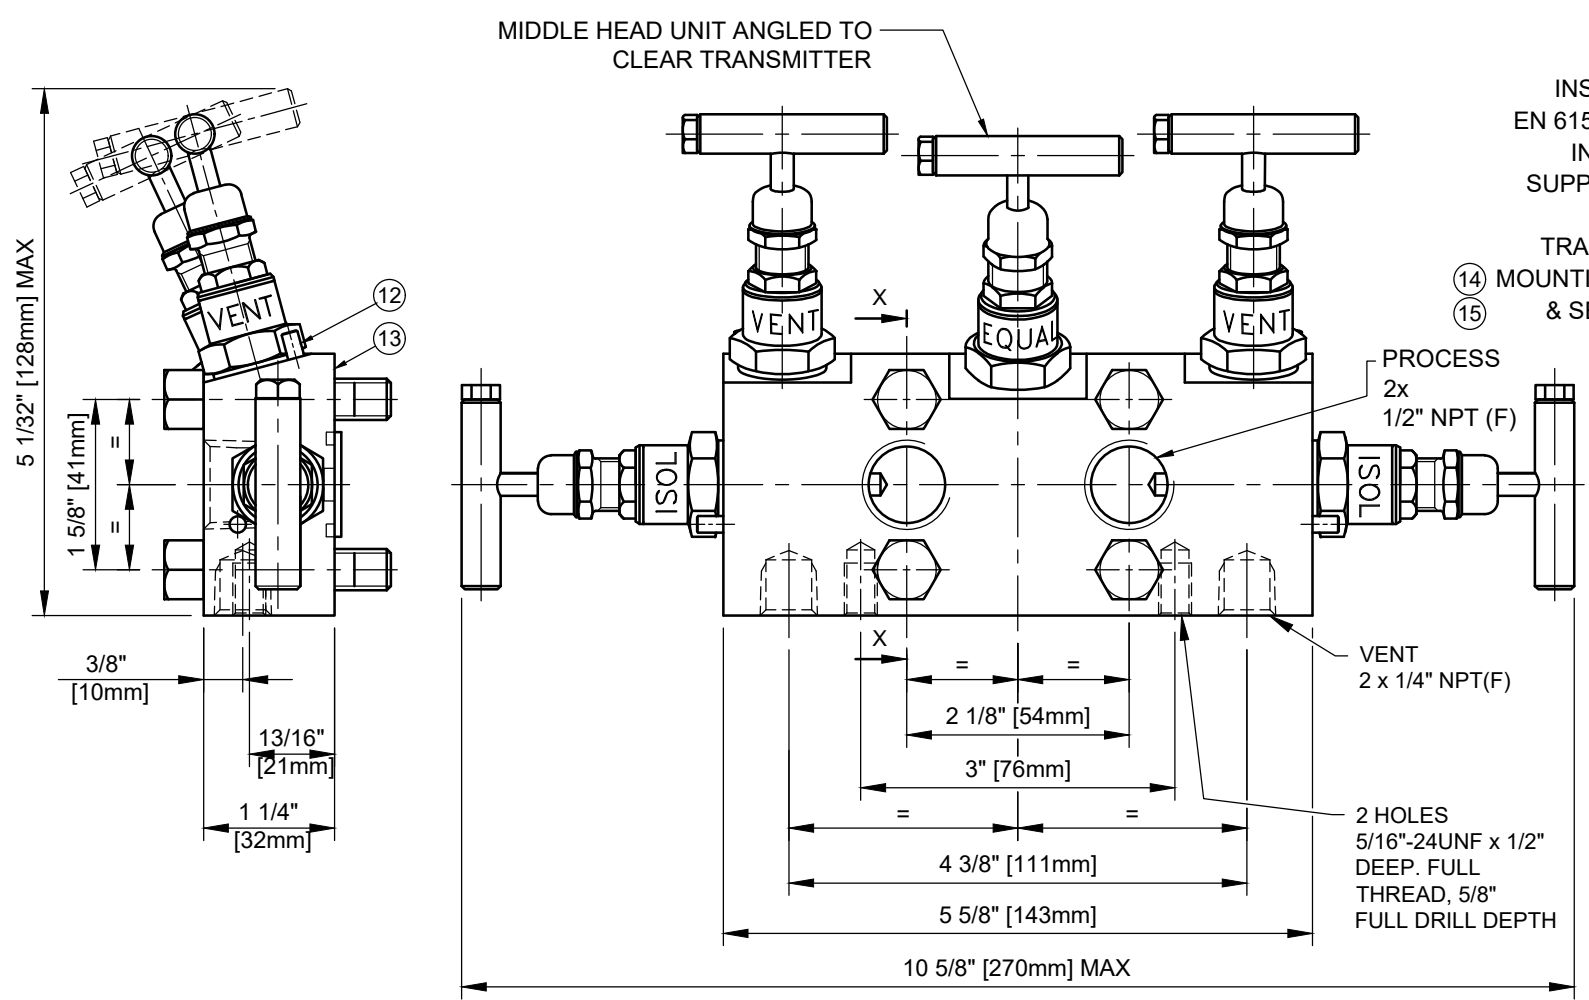

HEADUNIT DETAIL

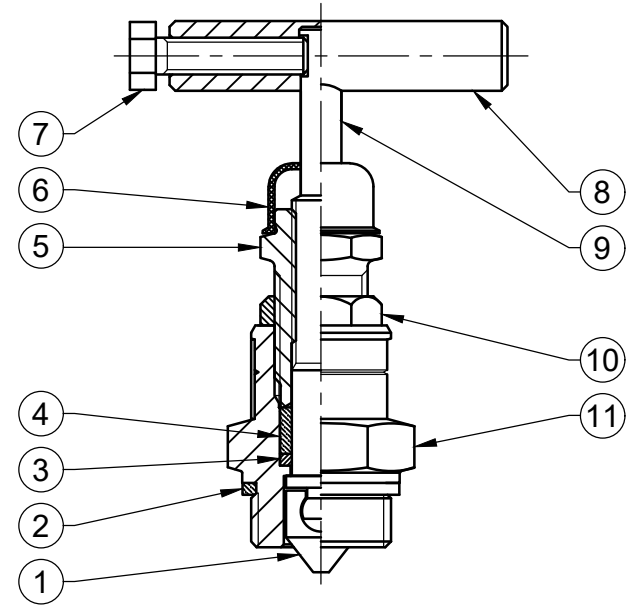

REF No	DESCRIPTION	MATERIAL
		TITANIUM
1	TIP	ASTM B348 GR5
2	BODY SEAL	100% VIRGIN PTFE
3	PISTON RING	ASTM B348 GR5
4	SEAL BUSH	100% VIRGIN PTFE
5	PUSHER	316 SS
6	DUST CAP	LOTREX 2300
7	SCREW	A4 [316] SS
8	TEE BAR	316 SS
9	SPINDLE	ASTM B348 GR5
10	LOCKNUT	316 SS
11	SEAL HOUSING	ASTM B348 GR5
12	LOCK PIN	316 SS
13	BODY	ASTM B348 GR5
14	BOLTS	A4-80 SS
15	SEAL RINGS	100% VIRGIN PTFE

MARKING DETAILS
 (MARKING REFERENCE ONLY)



REMARK

- ADDITIONAL TAG PLATE FOR ADDITIONAL INFO UPON REQUESTED
- HCT HEAT CODE TRACEABILITY WILL BE MARKED ON BODY & END FITTINGS

THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF CRANE COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRANE COMPANY IS PROHIBITED.	APPROVALS	DATE	SPARTANBURG, SOUTH CAROLINA 29303
	CREATED ZL	09/10/2023	
REMOVE ALL BURRS, DO NOT SCALE DRAWING, DRILL POINTS STD	DRAWN ZL	09/10/2023	TITLE GENERAL ARRANGEMENT TYPE Y53 DIRECT MOUNT PIPE TO FLANGE ISD 61518TYPE-B, 5 VALVE MANIFOLD.
BREAK CORNERS 0.005 - 0.010	APPROVED JQ	12/10/2023	
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES TOLERANCES ARE: .XXX +.005 ANGLES 1:21 .XX +.010 CONCENTRICITY 1:0.015 .X +.060 MACHINE FINISH 63RMS	EC NUMBER X	INITIAL USAGE (REF ONLY) X	SCALE N.T.S. XXXXX
		CAD FILE NAME	DWG NO. A18702 SHEET 1 OF 1