





MAXIMUM WORKING CONDITIONS
 COLD WORKING PRESSURE:
 STANDARD, 6,000PSI (414BAR)
 (AT REDUCED TEMPERATURE)

TEMPERATURE:
 -29°C (-20.2°F) TO 200°C (392°F)
 (AT REDUCED PRESSURE)

APPROX WEIGHT
 5.7Kg

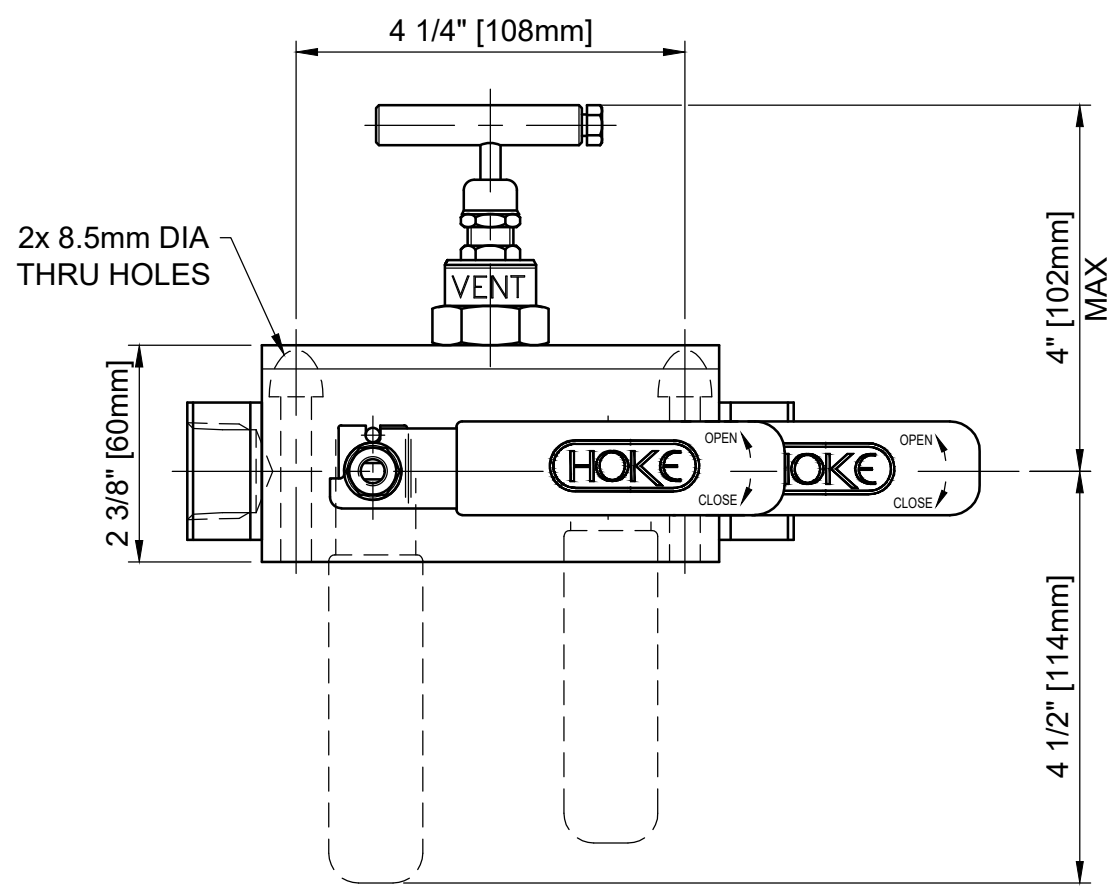

REF No	DESCRIPTION	MATERIAL
1	PROCESS CONNECTOR	6MO
2	BODY	ASTM A276/A479 UNS S31254
3	INSTRUMENT CONNECTOR	ASTM A276/A479 UNS S31254
4	SLEEVE	PVC
5	HANDLE	316 SS
6	NUT	A4 [316] SS
7	SERRATED WASHER	316 SS
8	PISTON RING	316 SS
9	THRUST SEAL	25% GLASS FILLED PTFE
10	SEAT	PEEK
11	BALL	ASTM A276/A479 UNS S31254
12	SPINDLE	ASTM B446 UNS N06625
13	END CONNECTOR SEAL	100% VIRGIN PTFE
14	SPINDLE O-RING	ELAST-O-LION 985
15	SPINDLE SEALS	15% GLASS FILLED PTFE
16	HANDLE STOP PIN	316 SS
17	SPINDLE&TIP	ASTM B446 UNS N06625
18	BODY SEAL	GRAPHITE
19	SEAL BUSH	GRAPHITE
20	PISTON RING	UNS N06625
21	PUSHER	316 SS
22	DUST CAP	LOTREX 2300
23	SCREW	A4 [316] SS
24	TEE BAR	316 SS
25	LOCKNUT	316 SS
26	SEAL HOUSING	ASTM A276/A479 UNS S31254
27	PRESSURE PLUG	ASTM A276/A479 UNS S31254

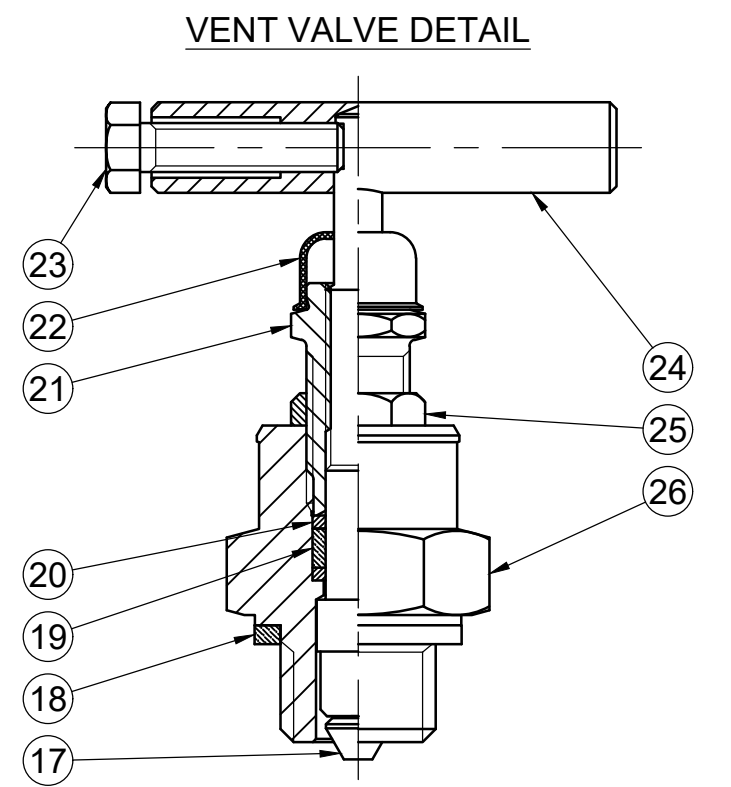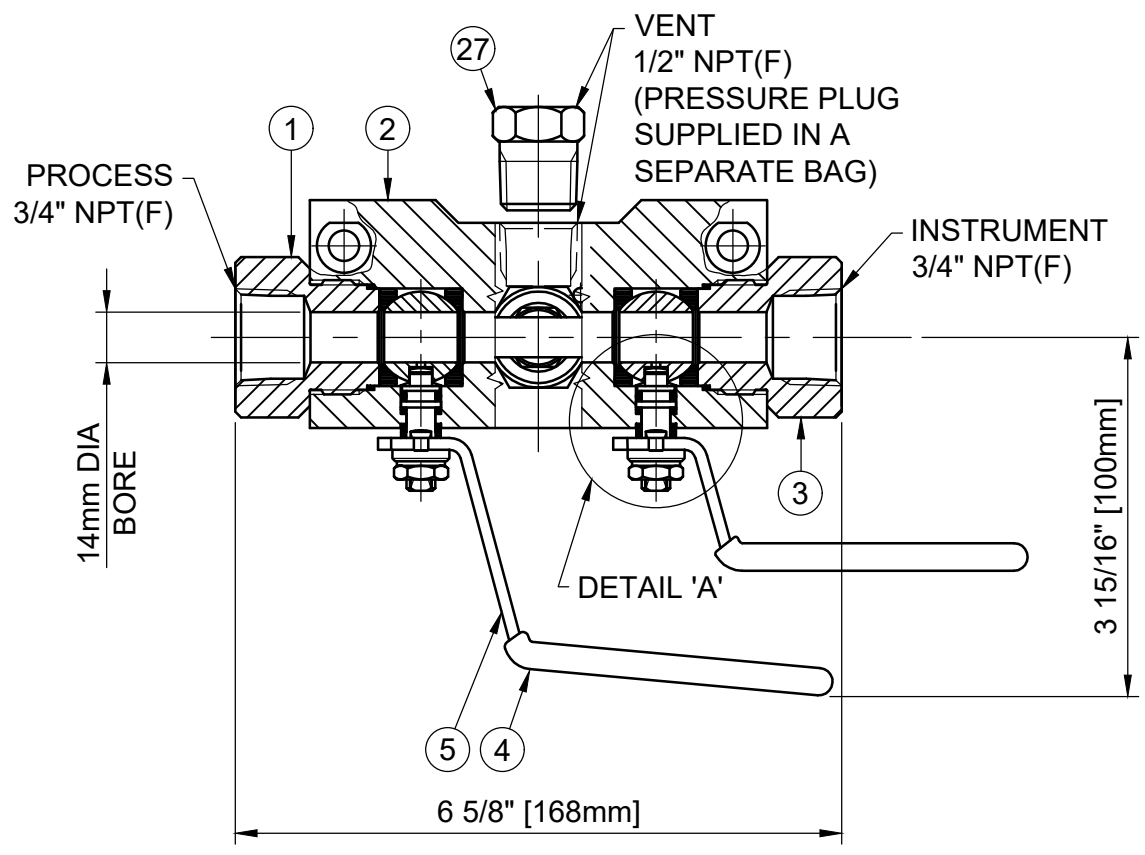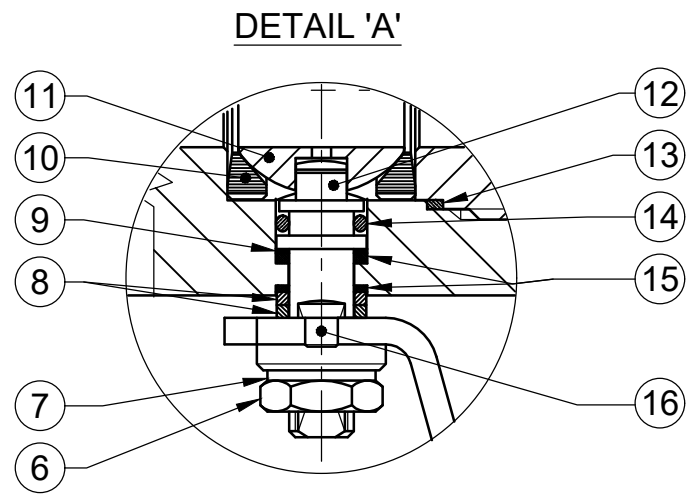

MARKING DETAILS
 (MARKING REFERENCE ONLY)



REMARK

- ADDITIONAL TAG PLATE FOR ADDITIONAL INFO UPON REQUESTED
- HCT HEAT CODE TRACEABILITY WILL BE MARKED ON BODY & END FITTINGS

THE INFORMATION CONTAINED IN THIS DRAWING IS THE PROPERTY OF CRANE COMPANY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CRANE COMPANY IS PROHIBITED.		APPROVALS	DATE	
REMOVE ALL BURRS, DO NOT SCALE DRAWING, DRILL POINTS STD		CREATED JQ	13/10/2023	
BREAK CORNERS 0.005 - 0.010		DRAWN JQ	13/10/2023	SPARTANBURG, SOUTH CAROLINA 29303 TITLE GENERAL ARRANGEMENT - 14mm BORE 'ID' TYPE DOUBLE BLOCK & BLEED MANIFOLD.
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES		APPROVED ZL	18/10/2023	
TOLERANCES ARE:		EC NUMBER	X	SIZE A3
.XXX +.005 ANGLES ±41° .XX +.010 CONCENTRICITY ±0.015 .X +.060 MACHINE FINISH: 63RMS		INITIAL USAGE (REF ONLY)	X	SCALE N.T.S.
		CAD FILE NAME		DWG. NO. A18673
				SHEET 1 OF 1